



MARKETED BY



TROJAN LIMITED

Villa Ningjing-Shiguang, Laoshan District, Qingdao, China.

Website: www.trojanlimited.com

E-mail: info@trojanlimited.com

Ver.22-1



Truck and Bus Tire Catalog



ONYX
RADIAL
PATTERN
RANGE

POSITION

ALL POSITION



STEER/TRAILER



DRIVE



TRAILER



LONG & REGIONAL HAUL



MIXED SERVICE



OFF ROAD



ONYX
RADIAL
PATTERN
RANGE

POSITION

ALL POSITION



STEER/TRAILER



DRIVE



TRAILER



LONG & REGIONAL HAUL



MIXED SERVICE



OFF ROAD





ALL POSITION



rsHO373

Features

All position tread pattern design
Special tread compound formula for Mid-Short distance
Triple zigzag main grooves and shoulder cross grooves design

Benefits

For a wide range of complex road conditions
Provides good tear resistance and improves wear mileage
Provides good grip on both dry and wet conditions



rsHO572

Features

All position tread pattern design
Special tread compound formula for Mid-Short distance
Triple zigzag main grooves and shoulder cross grooves design

Benefits

Provides good tear resistance and improves wear mileage
Provides good grip on both dry and wet conditions

Size	RsHO373	RsHO572
325/95R24	162/160K	162/160K



ALL POSITION



HO105

Features

- Three groove design with lugs
- Special tread compound
- Shoulder design with lugs and sipes

Benefits

- Provide outstanding wet performance
- Provide outstanding resistance to abrasion
- Provide excellent heat dissipation



HO117

Features

- Three zigzag grooves design with lugs
- Special tread compound
- Shoulder design with lugs and sipes

Benefits

- Provide excellent wet performance
- Provide outstanding resistance to abrasion
- Provide outstanding heat dissipation



HO599+

Features

- Four circumferential grooves
- Ladder arrangement design of longitudinal pattern
- Special tread compound
- Reinforced carcass and bead design

Benefits

- Ensure excellent water evacuation, even pressure distribution and heat dissipation
- Reduce irregular wear greatly
- Provide outstanding resistance to abrasion
- Ensure excellent handling and safe performance and provide outstanding loading capacity



HO599

Features

- Four circumferential grooves
- Ladder arrangement design of longitudinal pattern
- Special tread compound
- Reinforced carcass and bead design

Benefits

- Ensure excellent water evacuation, even pressure distribution and heat dissipation
- Reduce irregular wear greatly
- Provide outstanding resistance to abrasion
- Ensure excellent handling and safe performance and provide outstanding loading capacity

Size	HO105	HO117	HO599+	HO599
7.50R16LT				125/121 L
9.00R20	144/142 K			
10.00R20	149/146 K			
11.00R20	152/149 K		152/149 J	152/149 K
12.00R20	156/153 K			
12R22.5		152/149 L		



Features

- Four wide circumferential grooves
- Special groove design
- Siped rib and shoulder design

Benefits

- Ensure excellent water evacuation, even pressure distribution and heat dissipation
- Deliver stone-ejecting property
- Provide excellent heat dissipation

***HO101**



Features

- Four wide circumferential grooves
- Siped rib and shoulder design
- Reinforced carcass and wide tread
- Specially designed compound

Benefits

- Ensure excellent water evacuation, even pressure distribution and heat dissipation
- Provide excellent heat dissipation
- Ensure excellent handling and safe performance
- Deliver lower rolling resistance

***HO102**



Features

- Four zigzag grooves
- Solid shoulder design
- Variable pitch design
- Specially designed compound

Benefits

- Provide excellent anti-sideslipping performance and ensure excellent water evacuation
- Provide outstanding resistance to abrasion
- Reduce rolling noise greatly
- Deliver lower rolling resistance

***HO104**



Features

- Four zigzag grooves
- Solid shoulder design
- Variable pitch design
- Specially designed compound

Benefits

- Provide excellent anti-sideslipping performance and ensure excellent water evacuation
- Provide outstanding resistance to abrasion
- Reduce rolling noise greatly
- Deliver lower rolling resistance

***HO104+**

Size	HO101	HO102	HO104	HO104+	Remarks
9.00R20			144/142 K		The symbol of "*" represents patterns applicable for all position bus.
10.00R20			149/146 K		
11.00R20			152/149 K		
12.00R20			156/153 K		
11R22.5	148/145 M	148/145 M	148/145 M		
12R22.5	152/149 M	152/149 M			
13R22.5		156/152 L(154/151 M)			
215/75R17.5		135/133 J			
255/70R22.5		140/137 L			
295/80R22.5		152/149 M			
315/70R22.5		154/150 L(152/148 M)			
315/80R22.5		156/152 L(154/151 M)		156/152 L(154/151 M)	



Features

- Four wide circumferential grooves
- Siped rib and shoulder design
- Specially designed compound

Benefits

- Ensure excellent water evacuation, even pressure distribution and heat dissipation
- Provide excellent heat dissipation
- Deliver lower rolling resistance

HO106



Features

- Solid rib design combined with multiple sipes
- Four wide circumferential grooves
- Solid shoulder design

Benefits

- Provide excellent heat dissipation and improved regular wear with lower resistance
- Ensure excellent water evacuation, even pressure distribution and heat dissipation
- Provide outstanding resistance to abrasion

HO111



Features

- Four circumferential grooves
- Solid shoulder design
- Specially designed compound

Benefits

- Provide excellent anti-sideslipping performance and ensure excellent water evacuation
- Provide outstanding resistance to abrasion
- Reduce rolling noise greatly
- Deliver lower rolling resistance

HO121



Features

- Four circumferential grooves
- Solid shoulder design
- Specially designed compound

Benefits

- Provide excellent anti-sideslipping performance and ensure excellent water evacuation
- Provide outstanding resistance to abrasion
- Reduce rolling noise greatly
- Deliver lower rolling resistance

HO123

Size	HO106	HO111	HO121	HO123
8.25R16LT				
11.00R20			152/149 K	152/149 K
9.5R17.5			143/141 J	
11R22.5		146/143 L		
11R24.5		146/143 M		
11R24.5		149/146 L		
215/75R17.5		135/133 L		
235/75R17.5		143/141 L		
225/70R19.5		128/126 L		
245/70R19.5		135/133 L		
255/70R22.5		140/137 L		
295/75R22.5		144/141 M		
295/75R22.5		146/143 L		
295/80R22.5	152/149 M		152/149 M	
315/70R22.5			154/150 L(152/148 M)	
315/80R22.5			156/152 L(154/151 M)	
285/75R24.5		144/141 M		
285/75R24.5		147/144 L		



HO124

Features

- Solid rib design combined with multiple sipes
- Four wide circumferential grooves
- Solid shoulder design

Benefits

- Provide excellent heat dissipation and improved regular wear with lower resistance
- Ensure excellent water evacuation, even pressure distribution and heat dissipation
- Provide outstanding resistance to abrasion



HO680

Features

- Solid rib design combined with multiple sipes
- Four wide circumferential grooves
- Solid shoulder design

Benefits

- Provide excellent heat dissipation and improved regular wear with lower resistance
- Ensure excellent water evacuation, even pressure distribution and heat dissipation
- Provide outstanding resistance to abrasion



HO127

Features

- Solid rib design combined with multiple sipes
- Four wide circumferential grooves
- Solid shoulder design

Benefits

- Provide excellent heat dissipation and improved regular wear with lower resistance
- Ensure excellent water evacuation, even pressure distribution and heat dissipation
- Provide outstanding resistance to abrasion



HO788

Features

- Four wide circumferential grooves
- Siped rib and shoulder design
- Reinforced carcass and wide tread
- Specially designed compound

Benefits

- Ensure excellent water evacuation, even pressure distribution and heat dissipation
- Provide excellent heat dissipation
- Ensure excellent handling and safe performance
- Deliver lower rolling resistance

Size	HO124	HO680	HO127	HO788
7.50R16LT			125/121 L	152/149 M
295/80R22.5				
315/80R22.5	156/152 L(154/151 M)	156/152 L(154/151 M)		



HO689

Features

- Solid rib design combined with multiple sipes
- Four wide circumferential grooves
- Solid shoulder design

Benefits

- Provide excellent heat dissipation and improved regular wear with lower resistance
- Ensure excellent water evacuation, even pressure distribution and heat dissipation
- Provide outstanding resistance to abrasion

Size	HO689
12.00R24	160/157 K



Features

- Three circumferential grooves
- Block pattern design
- Special tread compound
- Solid shoulder design

Benefits

- Ensure outstanding water evacuation, even pressure distribution and heat dissipation
- Provide excellent driving and braking force
- Provide outstanding resistance to puncture and tearing
- Provide outstanding resistance to abrasion



Features

- Special tread compound
- Four circumferential grooves
- Deeper tread depth design
- Block pattern design

Benefits

- Provide outstanding resistance to puncture and tearing
- Ensure excellent water evacuation, even pressure distribution and heat dissipation
- Improved mileage performance
- Provide excellent driving and braking force



Features

- Asymmetric lug design
- Block pattern design
- Four circumferential grooves
- Reinforced carcass and bead design

Benefits

- Combine regular wear with excellent traction
- Provide excellent driving and braking force
- Ensure excellent water evacuation, even pressure distribution and heat dissipation
- Ensure excellent handling and safe performance and provide outstanding loading capacity



Features

- Four circumferential grooves
- Block pattern design
- Special tread compound
- Solid shoulder design

Benefits

- Ensure excellent water evacuation, even pressure distribution and heat dissipation
- Provide excellent driving and braking force
- Provide outstanding resistance to puncture and tearing
- Provide outstanding resistance to abrasion



Features

- Block pattern design
- Solid shoulder design
- Four wide circumferential grooves

Benefits

- Provide excellent driving and braking force
- Provide outstanding resistance to abrasion
- Ensure excellent water evacuation, even pressure distribution and heat dissipation



Features

- Block pattern design
- Extra wide footprint
- Deeper tread depth design

Benefits

- Provide excellent driving and braking force
- Enhanced stability and resistance to abrasion
- Improved mileage performance



Features

- Block pattern design
- Extra wide footprint
- Deeper tread depth design

Benefits

- Provide excellent driving and braking force
- Enhanced stability and resistance to abrasion
- Improved mileage performance



Features

- Block pattern design
- Open shoulder design
- Special tread compound

Benefits

- Provide excellent traction
- Improved heat dissipation to increase tire life
- Provide mileage performance

Size	HO122	HO368	HO309	HO310
10.00R20		149/146 K		
12.00R24	160/157 K			160/157 K
11R22.5			148/145 M	
12R22.5			152/149 L	
13R22.5			156/152 L(154/151 M)	
215/75R17.5			135/133 J	
235/75R17.5			143/141 J	
295/80R22.5		152/149 M	152/149 M	
315/70R22.5			154/150 L(152/148 M)	
315/80R22.5	156/152 L(154/151 M)		156/152 L(154/151 M)	

Size	HO312	HO308A	HO505	HO323
10.00R20		149/146 K	149/146 K	
11R22.5	146/143 L	148/145 M		146/143 L
12R22.5		152/149 M		
11R24.5	146/143 M			146/143 M
11R24.5	149/146 L			149/146 L
295/75R22.5	144/141 M			144/141 M
295/75R22.5	146/143 L			146/143 L
315/70R22.5		154/150 L(152/148 M)		
315/80R22.5		156/152 L(154/151 M)		
285/75R24.5	144/141 M			144/141 M
285/75R24.5	147/144 L			147/144 L



HO326

Features

- Asymmetric lug design
- Block pattern design
- Four circumferential grooves
- Reinforced carcass and bead design

Benefits

- Combine regular wear with excellent traction
- Provide excellent driving and braking force
- Ensure excellent water evacuation, even pressure distribution and heat dissipation
- Ensure excellent handling and safe performance and provide outstanding loading capacity



HO328

Features

- Block pattern design
- Extra wide footprint
- Deeper tread depth design

Benefits

- Provide excellent driving and braking force
- Enhanced stability and resistance to abrasion
- Improved mileage performance



HO331

Features

- Block pattern design
- Solid shoulder design
- Four wide circumferential grooves

Benefits

- Provide excellent driving and braking force
- Provide outstanding resistance to abrasion
- Ensure excellent water evacuation, even pressure distribution and heat dissipation



HO616

Features

- Asymmetric lug design
- Block pattern design
- Four circumferential grooves
- Reinforced carcass and bead design

Benefits

- Combine regular wear with excellent traction
- Provide excellent driving and braking force
- Ensure excellent water evacuation, even pressure distribution and heat dissipation
- Ensure excellent handling and safe performance and provide outstanding loading capacity

Size	HO326	HO328	HO331	HO616
9.00R20				144/142 K
10.00R20				149/146 K
12.00R20				156/153 K
295/80R22.5	152/149 M			
315/70R22.5	154/150 L			
315/80R22.5	156/152 L	156/152 L	156/152 L	



HO626

Features

- Block pattern design
- Solid shoulder design
- Four wide circumferential grooves

Benefits

- Provide excellent driving and braking force
- Provide outstanding resistance to abrasion
- Ensure excellent water evacuation, even pressure distribution and heat dissipation



HO308A+

Features

- Block pattern design
- Extra wide footprint
- Deeper tread depth design

Benefits

- Provide excellent driving and braking force
- Enhanced stability and resistance to abrasion
- Improved mileage performance



HO327

Features

- Block pattern design
- Solid shoulder design
- Four wide circumferential grooves

Benefits

- Provide excellent driving and braking force
- Provide outstanding resistance to abrasion
- Ensure excellent water evacuation, even pressure distribution and heat dissipation

Size	HO626	HO308A+	HO327
10.00R20	149/146 K		
11.00R20	152/149 K		
12R22.5		152/149 M	
315/80R22.5			156/152 L(154/151 M)



HO107

Features

- Four zigzag grooves
- Extra wide footprint with square shoulder
- Special tread compound

Benefits

- Provide excellent anti-sidesliping performance and ensure excellent water evacuation
- Enhanced stability and resistance to abrasion
- Provide outstanding resistance to abrasion



HO118

Features

- Four circumferential grooves
- Special groove design
- Curved lug design

Benefits

- Ensure excellent water evacuation, even pressure distribution and heat dissipation
- Deliver stone-ejecting property
- Deliver excellent driving and braking force



HO126

Features

- Four circumferential groove designs
- Reduced tire weight

Benefits

- Improved antiskid performance
- Deliver rolling resistance and lower fuel consumption

Size	HO107	HO118	HO126
11R22.5		148/145 M	146/143 L
12R22.5		152/149 M	
11R24.5			149/146 L
235/75R17.5	143/141 J		
295/75R22.5		144/141 M	
295/75R22.5		146/143 L	146/143 L
385/65R22.5	160 K		
285/75R24.5			147/144 L



Mixed Service



Operation:

- Frequently used on and off roads
- Heavier loads
- Construction site



ALL POSITION



Features

- Three zigzag grooves
- Combination of rib and lug design
- Shoulder design with lugs

Benefits

- Provide excellent anti-sideslip performance and ensure excellent water evacuation
- Deliver outstanding traction and handling
- Provide excellent heat dissipation



Features

- Three zigzag grooves
- Combination of rib and lug design
- Shoulder design with lugs

Benefits

- Provide excellent anti-sideslip performance and ensure excellent water evacuation
- Deliver outstanding traction and handling
- Provide excellent heat dissipation



Features

- Three zigzag grooves
- Reinforced carcass and bead design
- Special groove design
- Shoulder design with lugs

Benefits

- Provide excellent anti-sideslip performance and ensure excellent water evacuation
- Ensure excellent handling and safe performance and provide outstanding loading capacity
- Deliver stone-ejecting property
- Provide excellent heat dissipation



Features

- Three zigzag grooves
- Combination of rib and lug design
- Shoulder design with lugs

Benefits

- Provide excellent anti-sideslip performance and ensure excellent water evacuation
- Deliver outstanding traction and handling
- Provide excellent heat dissipation



Features

- Special tread compound
- Block pattern design
- Extra wide footprint with square shoulder
- Reinforced carcass and bead design

Benefits

- Provide outstanding resistance to puncture and tearing
- Provide excellent driving and braking force
- Enhanced stability and resistance to abrasion
- Ensure excellent handling and safe performance and provide outstanding loading capacity



DRIVE



Features

- Lug and block pattern design
- Special tread compound

Benefits

- Improved traction, driving and braking performance
- Provide outstanding resistance to puncture and tearing



Features

- Special tread compound
- Lug and block pattern design
- Spied pattern and shoulder design

Benefits

- Provide outstanding resistance to puncture and tearing
- Improved traction, driving and braking performance
- Provide excellent heat dissipation



Features

- Lug and block pattern design
- Special groove design
- Special tread compound
- Open shoulder design

Benefits

- Improved traction, driving and braking performance
- Deliver stone-ejecting property
- Provide outstanding resistance to puncture and tearing
- Provide excellent heat dissipation

Size	HO301	HO301+	HO307	HO105+
6.50R16LT	110/105 K			
7.00R16LT	118/114 M			
7.50R16LT		122/118 M		
8.25R16LT	128/124 M			
8.25R20	139/137 L			
9.00R20	144/142 K			
10.00R20	149/146 K		149/146 K	
11.00R20	152/149 K		152/149 K	
12.00R20	156/153 K		156/153 K	
12.00R24	160/157 K			
11R22.5	148/145 M			
12R22.5	152/149 M		152/149 L	
13R22.5	156/152 L(154/151 M)			
11R24.5	149/146 L			
315/80R22.5		156/152 L(154/151 M)		156/152 L(154/151 M)

Size	HO302	HO306	HO311	HO313
7.00R16LT		118/114 M		
7.50R16LT		122/118 M		122/118 M
8.25R16LT		128/124 M		128/124 M
8.25R20		139/137 L		139/137 K
9.00R20		144/142 K	144/142 J	144/142 K
10.00R20	149/146 K	149/146 K	149/146 K	149/146 K
11.00R20	152/149 J	152/149 K	152/149 K	152/149 K
12.00R20	156/153 K	156/153 K	156/153 K	156/153 K
12R22.5	152/149 M		152/149 M	
13R22.5	156/152 L(154/151 M)			
315/80R22.5	156/152 L(154/151 M)			

Mixed
Service



DRIVE



Features

- Special tread compound
- Lug and special block pattern design

Benefits

- Provide outstanding resistance to puncture and tearing
- Improved traction, driving and braking performance

HO322



Features

- Special tread compound
- Lug and special block pattern design

Benefits

- Provide outstanding resistance to puncture and tearing
- Improved traction, driving and braking performance

HO329



Features

- Inter-connected block pattern
- Reinforced carcass and bead design
- Special groove design

Benefits

- Provide excellent driving force, cutting resistance and even wear
- Ensure excellent handling and safe performance and provide outstanding loading capacity
- Deliver stone-ejecting property

HO303



Features

- Special tread compound
- Lug and special block pattern design

Benefits

- Provide outstanding resistance to puncture and tearing
- Improved traction, driving and braking performance

HO325



Features

- Large block & Deep groove design
- Open shoulder design
- Optimized tread compound
- Special horizontal small groove design

HO302W

Benefits

- Provides excellent traction and braking force
- Provides good traction and self-cleaning performance
- Provides excellent tear resistance, cut resistance and snow traction
- Improve snow traction performance

Features

- Special tread compound
- Lug and special block pattern design



HO399

Benefits

- Provide outstanding resistance to puncture and tearing
- Improved traction, driving and braking performance

Size	HO322	HO329	HO303	HO325
7.00R16LT			118/114 K	
7.50R16LT			122/118 J	
8.25R16LT			128/124 J	
8.25R20			139/137 K	
9.00R20			144/142 J	
10.00R20			149/146 K	
11.00R20			152/149 J	
12.00R20			156/153 J	
12.00R24	160/157 K	160/157 K		160/157 K
11R22.5		148/145 L		
315/80R22.5	156/152 L(154/151 M)			

Size	HO302W	HO399
9.00R20		144/142 K
10.00R20		149/146 K
11.00R20		152/149 K
12.00R20		156/153 K
315/80R22.5	156/152 L(154/151 M)	



Operation:

- Mostly used on rugged terrain like mining or heavy construction
- Heavier loads
- High risk of damage from road conditions



Features

- Special tread compound
- Lug and special block pattern design

Benefits

- Provide outstanding resistance to puncture and tearing
- Improved traction, driving and braking performance



Features

- Special tread compound
- Block pattern design
- Reinforced carcass and bead design

Benefits

- Provide outstanding resistance to puncture and tearing
- Improved traction, driving and braking performance
- Ensure excellent handling and safe performance and provide outstanding loading capacity



Features

- Lug and block pattern design
- Special tread compound
- Reinforced carcass and bead design

Benefits

- Improved traction, driving and braking performance
- Provide outstanding resistance to puncture and tearing
- Ensure excellent handling and safe performance and provide outstanding loading capacity



Features

- Special tread compound
- Lug and block pattern design
- Reinforced carcass and bead design

Benefits

- Provide outstanding resistance to puncture and tearing
- Improved traction, driving and braking performance
- Ensure excellent handling and safe performance and provide outstanding loading capacity

Size	HO168	HO317	HO318	HO320
7.00R16LT	118/114 K			
7.50R16LT	122/118 K			
8.25R16LT	128/124 K			
8.25R20	139/137 C		139/137 C	
9.00R20	144/142 C		144/142 C	
10.00R20	149/146 C	149/146 K	149/146 C	
11.00R20		152/149 K	152/149 C	
12.00R20	154/151 C	154/151 K	154/151 C	
12.00R24		160/157 C		
295/80R22.5			152/149 C	152/149 C



DRIVE/TRAILER



HO321

Features

- Lug and block pattern design
- Special tread compound
- Reinforced carcass and bead design

Benefits

- Improved traction, driving and braking performance
- Provide outstanding resistance to puncture and tearing
- Ensure excellent handling and safe performance and provide outstanding loading capacity



HO929

Features

- Special tread compound
- Lug and block pattern design
- Reinforced carcass and bead design

Benefits

- Provide outstanding resistance to puncture and tearing
- Improved traction, driving and braking performance
- Ensure excellent handling and safe performance and provide outstanding loading capacity

Size	HO321	HO929
11.00R20	152/149 C	152/149 J
12.00R20	154/151 C	



DRIVE/TRAILER



HO826

Features

- Lug and block pattern design
- Special tread compound
- Reinforced carcass and bead design

Benefits

- Improved traction, driving and braking performance
- Provide outstanding resistance to puncture and tearing
- Ensure excellent handling and safe performance and provide outstanding loading capacity



HO332

Features

- Lug and block pattern design
- Special tread compound
- Reinforced carcass and bead design

Benefits

- Improved traction, driving and braking performance
- Provide outstanding resistance to puncture and tearing
- Ensure excellent handling and safe performance and provide outstanding loading capacity

Size	HO826	HO332
12.00R24	160/157 K	
11R22.5	146/143 M	148/145 J
11R24.5		149/146 K
295/80R22.5	152/149 M	



Operation:

- Highways and long distance / Regional highways and city streets
- Well paved road conditions / Mainly used on paved roads, occasionally run on unpaved roads
- Constant and high speed with minimal braking and accelerating / Frequent braking, accelerating and turning



ALL POSITION



Features

- Special tread compound
- Three zigzag grooves
- Special groove design
- Optimized pattern design

Benefits

- Provide outstanding resistance to abrasion
- Provide good applicability for all position
- Deliver stone-ejecting property
- Provide outstanding resistance to irregular abrasion



Features

- Special tread compound
- Rib pattern with horizontal siping and grooves

Benefits

- Lower fuel consumption
- Better handling and traction



Features

- Special tread compound
- Rib pattern with horizontal siping and grooves

Benefits

- Better mileage and wear resistance
- Improved handling and wet grip



Features

- Reinforced sidewalls
- Special compound for urban application
- New construction

Benefits

- Better protection against curbing and abrasions
- Improved mileage
- Improved retreadability

Size	NAR515	NAR532	NAL536	NAU512
8R19.5			124/122 M	
9R22.5			136/134 M	
10R22.5			141/139 M	
11R22.5	144/142 M	144/142 M		
11R22.5	148/145 L	146/143 L		
12R22.5	152/149 L			
11R24.5		146/143 M		
11R24.5		149/146 L		
275/70R22.5	148/145 M			148/145 J
295/75R22.5		144/141 M		
295/75R22.5		146/143 L		
295/80R22.5	152/149 M			
315/80R22.5	156/152 K		157/154 K	
285/75R24.5		144/141 M		
285/75R24.5		147/144 L		



Features

- Special tread compound
- Three zigzag grooves
- Special groove design
- Optimized pattern design

Benefits

- Provide outstanding resistance to abrasion
- Provide good applicability for all position
- Deliver stone-ejecting property
- Provide outstanding resistance to irregular abrasion



Features

- Special tread compound
- Rib pattern with horizontal siping and grooves

Benefits

- Better mileage and wear resistance
- Improved handling and wet grip

Size	NAR518	NAL535
8.25R15		129/127 L
8.25R15TR		129/127 L
10.00R15TR		137/135 L
215/75R17.5		135/133 J
225/75R17.5	129/127 M	
235/75R17.5		143/141 J
245/70R17.5	136/134 M	
245/70R17.5	143/141 J(146/146 F)	
225/70R19.5		128/126 M
245/70R19.5		133/131 M
245/70R19.5	136/134 M	
245/70R19.5	141/140 J	
265/70R19.5	140/138 M	
265/70R19.5	143/141 J	
285/70R19.5	146/144 L(144/142 M)	
285/70R19.5	150/148 J	
255/70R22.5		140/137 L
275/70R22.5		152/148 J



Features

- Special tread compound
- Shoulder protection design

Benefits

- Lower fuel consumption
- Reduce uneven wear on shoulder



Features

- Special tread compound
- Shoulder protection design

Benefits

- Lower fuel consumption
- Reduce uneven wear on shoulder

Size	NSL129	NAL568
8.5R17.5		121/120 M
11R22.5	144/142 M	
11R24.5	146/143 M	
295/75R22.5	144/141 M	
285/75R24.5	144/141 M	



Features

- Solid and wide shoulder with deep tread
- Stone ejectors

Benefits

- Better mileage
- Prevent stone drilling



Features

- Deep groove with stone ejectors
- Open shoulder block pattern

Benefits

- Prevent stone drilling
- Improved traction



Features

- Special tread compound
- Special drive tread design and optimised footprint
- New construction

Benefits

- Improved mileage
- Better traction and handling
- Even wear



Features

- Optimized pattern design
- Special groove design
- Reinforced carcass and wide tread
- Specially designed compound

Benefits

- Provide outstanding resistance to irregular abrasion
- Deliver stone-ejecting property
- Ensure excellent handling and safe performance
- Provide outstanding resistance to abrasion
- Deliver lower rolling resistance



Features

- Special tread compound
- Rib pattern with siping

Benefits

- Lower fuel consumption
- Better wet grip performance and lateral stability



Features

- Optimization of the ratio of tread block
- Low rolling resistance tire tread compound formulation
- Multiple angle groove wall and stone kicker design
- Extra wide ground contact

Benefits

- Prevent uneven wear
- Provide better fuel efficiency
- Deliver stone ejecting property
- Provide excellent longer wear performance and high mileage

Size	NDL230	NDR233	NDR255
10R22.5		141/139 L	
11R22.5	144/142 M		
11R22.5	146/143 L	146/143 L	
11R24.5	146/143 L		
11R24.5	149/146 L	149/146 L	
265/70R19.5			143/141 J
295/75R22.5	144/141 M		
295/75R22.5	146/143 L		
285/75R24.5	144/141 L		
285/75R24.5	147/144 L		

Size	NTL311	NTL331	NTL357
11R22.5		144/142 M	
11R22.5		146/143 M	
435/50R19.5			160 J
295/75R22.5		144/141 M	
285/75R24.5		144/141 M	
385/55R22.5	160 K(158 L)		
385/65R22.5	160 K(158 L)		
425/65R22.5	165 K		
445/65R22.5	169 K		



Operation:

- Frequently used on and off roads
- Heavier loads
- Construction site



ALL POSITION



Features

- Three zigzag grooves
- Combination of rib and lug design
- Shoulder design with lugs

Benefits

- Provide excellent anti-sideslipping performance and ensure excellent water evacuation
- Deliver outstanding traction and handling
- Provide excellent heat dissipation



Features

- Zigzag pattern
- Special tread compound

Benefits

- Improved traction and handling in mixed service application
- Better resistance to chipping

Size	NAM517	NAM537
12.00R24	160/157 K	
11R22.5	148/145 K	146/143 K
11R24.5		149/146 K
12R22.5	152/149 K	
295/80R22.5	152/149 K	
315/80R22.5	156/152 K	



Features

- Deep tread block pattern
- Special groove design
- Tread compound for mixed service

Benefits

- Improved traction
- Self cleaning
- Better resistance to chipping



Features

- Special tread compound
- Lug and block pattern design
- Special groove design

Benefits

- Provide outstanding resistance to puncture and tearing
- Improved traction, driving and braking performance
- Deliver stone-ejecting property

Size	NDM216
11R22.5	148/145 G
11R22.5	146/143 J

Size	NTM313
385/65R22.5	160 K(158 L)



Features

- Three zigzag grooves
- Combination of rib and lug design
- Shoulder design with lugs

Benefits

- Provide excellent anti-sideslipping performance and ensure excellent water evacuation
- Deliver outstanding traction and handling
- Provide excellent heat dissipation

HO601xs



Sizes	Ply Rating	Measuring Rim	Load Index/Speed Rating	Standard pressure
11R22.5	16PR	8.25	146/143 M	830/830
315/80R22.5	20PR	9.00	156/152L (154/151M)	860/860
12R22.5	18PR	9.00	152/149 M	860/860



Features

- Block pattern design
- Extra wide footprint
- Deeper tread depth design

Benefits

- Provide excellent driving and braking force
- Enhanced stability and resistance to abrasion
- Improved mileage performance

HO605xs



Sizes	Ply Rating	Measuring Rim	Load Index/Speed Rating	Standard pressure
295/80R22.5	18PR	9.00	152/149 M	900/900
315/80R22.5	20PR	9.00	156/152L (154/151M)	860/860



Features

- Four wide circumferential grooves
- Siped rib and shoulder design
- Reinforced carcass and wide tread
- Specially designed compound

Benefits

- Ensure excellent water evacuation, even pressure distribution and heat dissipation
- Provide excellent heat dissipation
- Ensure excellent handling and safe performance
- Deliver lower rolling resistance

HO602xs



Sizes	Ply Rating	Measuring Rim	Load Index/Speed Rating	Standard pressure
12R22.5	18PR	9.00	152/149 M	930/930
295/80R22.5	18PR	9.00	152/149 M	900/900
315/80R22.5	20PR	9.00	156/152L (154/151M)	860/860



Features

- Block pattern design
- Extra wide footprint
- Deeper tread depth design

Benefits

- Provide excellent driving and braking force
- Enhanced stability and resistance to abrasion
- Improved mileage performance

HO607xs



Sizes	Ply Rating	Measuring Rim	Load Index/Speed Rating	Standard pressure
11R22.5	16PR	8.25	146/143 M	830/830
315/80R22.5	20PR	9.00	156/152L (154/151M)	860/860



Features

- Four circumferential grooves
- Solid shoulder design
- Specially designed compound

Benefits

- Provide excellent driving and braking force
- Enhanced stability and resistance to abrasion
- Improved mileage performance

HO603xs



Sizes	Ply Rating	Measuring Rim	Load Index/Speed Rating	Standard pressure
11R22.5	16PR	8.25	146/143 M	830/830
295/80R22.5	18PR	9.00	152/149 M	900/900
315/80R22.5	20PR	9.00	156/152L (154/151M)	860/860



Features

- Large block & Deep groove design
- Open shoulder design
- Optimized tread compound
- Special horizontal small groove design

Benefits

- Provides excellent traction and braking force
- Provides good traction and self-cleaning performance
- Provides excellent tear resistance & cut resistance

HO608xs



Sizes	Ply Rating	Measuring Rim	Load Index/Speed Rating	Standard pressure
315/80R22.5	20PR	9.00	156/152L (154/151M)	860/860

ONYX



Features

- Asymmetric lug design
- Block pattern design
- Four circumferential grooves
- Reinforced carcass and bead design

Benefits

- Combine regular wear with excellent traction
- Provide excellent driving and braking force
- Ensure excellent water evacuation, even pressure distribution and heat dissipation
- Ensure excellent handling and safe performance and provide outstanding loading capacity

HO609xs



Sizes	Ply Rating	Measuring Rim	Load Index/Speed Rating	Standard pressure
315/80R22.5	20PR	9.00	156/152L (154/151M)	860/860
315/80R22.5	20PR	9.00	156/152L (154/151M)	860/860

ONYX



Features

- Three circumferential grooves
- Block pattern design
- Special tread compound
- Solid shoulder design

Benefits

- Ensure outstanding water evacuation, even pressure distribution and heat dissipation
- Provide excellent driving and braking force
- Provide outstanding resistance to puncture and tearing
- Provide outstanding resistance to abrasion

HO610xs



Sizes	Ply Rating	Measuring Rim	Load Index/Speed Rating	Standard pressure
315/80R22.5	20PR	9.00	156/152L (154/151M)	860/860

ONYX



Features

- Three zigzag grooves design with lugs
- Special tread compound
- Shoulder design with lugs and sipes

Benefits

- Provide excellent wet performance
- Provide outstanding resistance to abrasion
- Provide outstanding heat dissipation

HO612xs



Sizes	Ply Rating	Measuring Rim	Load Index/Speed Rating	Standard pressure
12R22.5	18PR	9.00	152/149 M	930/930
315/80R22.5	20PR	9.00	156/152L (154/151M)	860/860



Features

- Four wide circumferential grooves
- Special groove design
- Siped rib and shoulder design

Benefits

- Ensure excellent water evacuation, even pressure distribution and heat dissipation
- Deliver stone-ejecting property
- Provide excellent heat dissipation

HO613xs



Sizes	Ply Rating	Measuring Rim	Load Index/Speed Rating	Standard pressure
12R22.5	18PR	9.00	152/149 M	930/930



Features

- Three circumferential grooves
- Block pattern design
- Special tread compound
- Solid shoulder design

Benefits

- Ensure outstanding water evacuation, even pressure distribution and heat dissipation
- Provide excellent driving and braking force
- Provide outstanding resistance to puncture and tearing
- Provide outstanding resistance to abrasion

HO615xs



Sizes	Ply Rating	Measuring Rim	Load Index/Speed Rating	Standard pressure
12R22.5	18PR	9.00	152/149 M	930/930



Features

- Large block & Deep groove design
- Open shoulder design
- Optimized tread compound
- Special horizontal small groove design

Benefits

- Provides excellent traction and braking force
- Provides good traction and self-cleaning performance
- Provides excellent tear resistance & cut resistance

HO616xs



Sizes	Ply Rating	Measuring Rim	Load Index/Speed Rating	Standard pressure
12R22.5	18PR	9.00	152/149 M	930/930

ONYX



Features

- Four circumferential grooves
- Special groove design
- Curved lug design

Benefits

- Ensure excellent water evacuation, even pressure distribution and heat dissipation
- Deliver stone-ejecting property
- Deliver excellent driving and braking force

HO617xs



TRAILER

Sizes	Ply Rating	Measuring Rim	Load Index/Speed Rating	Standard pressure
315/80R22.5	20PR	9.00	156/152L (154/151M)	860/860
315/80R22.5	20PR	9.00	156/152L (154/151M)	860/860

ONYX



Features

- Three circumferential grooves
- Block pattern design
- Special tread compound
- Solid shoulder design

Benefits

- Ensure outstanding water evacuation, even pressure distribution and heat dissipation
- Provide excellent driving and braking force
- Provide outstanding resistance to puncture and tearing
- Provide outstanding resistance to abrasion

HO619xs



DRIVE

Sizes	Ply Rating	Measuring Rim	Load Index/Speed Rating	Standard pressure
315/80R22.5	20PR	9.00	156/152L (154/151M)	860/860

ONYX



Features

- Four zigzag grooves
- Extra wide footprint with square shoulder
- Special tread compound

Benefits

- Provide excellent anti-sideslipping performance and ensure excellent water evacuation
- Enhanced stability and resistance to abrasion
- Provide outstanding resistance to abrasion

HO621xs



TRAILER

Sizes	Ply Rating	Measuring Rim	Load Index/Speed Rating	Standard pressure
385/65R22.5	20PR	11.75	160 K	900



Features

- zigzag grooves
- Extra wide footprint with square shoulder
- Special tread compound

Benefits

- Provide excellent anti-sideslipping performance and ensure excellent water evacuation
- Enhanced stability and resistance to abrasion
- Provide outstanding resistance to abrasion

HO622xs



STEER/TRAILER

Sizes	Ply Rating	Measuring Rim	Load Index/Speed Rating	Standard pressure
385/65R22.5	20PR	11.75	160 K	900



Features

- Five lines zigzag grooves
- Extra wide footprint with square shoulder
- Special tread compound

Benefits

- Provide excellent anti-sideslipping performance and ensure excellent water evacuation
- Enhanced stability and resistance to abrasion
- Provide outstanding resistance to abrasion

HO623xs



STEER/TRAILER

Sizes	Ply Rating	Measuring Rim	Load Index/Speed Rating	Standard pressure
385/65R22.5	20PR	11.75	160 K	900



Features

- Large block & Deep groove design
- Open shoulder design
- Optimized tread compound
- Special horizontal small groove design

Benefits

- Provides excellent traction and braking force
- Provides good traction and self-cleaning performance
- Provides excellent tear resistance & cut resistance

HO625xs



TRAILER

Sizes	Ply Rating	Measuring Rim	Load Index/Speed Rating	Standard pressure
385/65R22.5	20PR	11.75	160 K	900



Features

- Four wide circumferential grooves
- Siped rib and shoulder design
- Reinforced carcass and wide tread
- Specially designed compound

Benefits

- Ensure excellent water evacuation, even pressure distribution and heat dissipation
- Provide excellent heat dissipation
- Ensure excellent handling and safe performance
- Deliver lower rolling resistance

HO626xs



STEER/TRAILER

Sizes	Ply Rating	Measuring Rim	Load Index/Speed Rating	Standard pressure
295/80R22.5	18PR	9.00	152/149 M	900/900



Features

- Three zigzag grooves
- Combination of rib and lug design
- Shoulder design with lugs

Benefits

- Provide excellent anti-sideslipping performance and ensure excellent water evacuation
- Deliver outstanding traction and handling
- Provide excellent heat dissipation

H0901



ALL POSITION

Sizes	Ply Rating	Measuring Rim	Load Index/Speed Rating	Standard pressure
12.00R20	20PR	8.5	156/153 K	900/900



Features

- Three zigzag grooves
- Combination of rib and lug design
- Shoulder design with lugs

Benefits

- Provide excellent anti-sideslipping performance and ensure excellent water evacuation
- Deliver outstanding traction and handling
- Provide excellent heat dissipation

NTL702



ALL POSITION

Sizes	Ply Rating	Measuring Rim	Load Index/Speed Rating	Standard pressure
12R22.5	18PR	9.00	152/149 M	930/930



Features

- Three groove design with lugs
- Special tread compound
- Shoulder design with lugs and sipes

Benefits

- Provide outstanding wet performance
- Provide outstanding resistance to abrasion
- Provide excellent heat dissipation

HO916



ALL POSITION

Sizes	Ply Rating	Measuring Rim	Load Index/Speed Rating	Standard pressure
12.00R20	20PR	8.5	156/153 K	900/900



Features

- Four wide circumferential grooves
- Siped rib and shoulder design
- Reinforced carcass and wide tread
- Specially designed compound

Benefits

- Ensure excellent water evacuation, even pressure distribution and heat dissipation
- Provide excellent heat dissipation
- Ensure excellent handling and safe performance
- Deliver lower rolling resistance

NTL660



STEER/TRAILER

Sizes	Ply Rating	Measuring Rim	Load Index/Speed Rating	Standard pressure
12R22.5	18PR	9.00	152/149 M	930/930



Features

- Lug and block pattern design
- Special groove design
- Special tread compound
- Open shoulder design

Benefits

- Improved traction, driving and braking performance
- Deliver stone-ejecting property
- Provide outstanding resistance to puncture and tearing
- Provide excellent heat dissipation

H0917



STEER/TRAILER

Sizes	Ply Rating	Measuring Rim	Load Index/Speed Rating	Standard pressure
12.00R20	20PR	8.5	156/153 K	900/900

ONYX



Features

- Three zigzag grooves
- Combination of rib and lug design
- Shoulder design with lugs

Benefits

- Provide excellent anti-sideslipping performance and ensure excellent water evacuation
- Deliver outstanding traction and handling
- Provide excellent heat dissipation

RSHO160



Sizes	Ply Rating	Measuring Rim	Load Index/Speed Rating	Standard pressure
385/65R22.5	20PR	11.75	160 K	900



Features

- Four circumferential grooves
- Solid shoulder design
- Variable pitch design

Benefits

- Provide excellent anti-sideslipping performance and ensure excellent water evacuation
- Provide outstanding resistance to abrasion
- Reduce rolling noise greatly
- Deliver lower rolling resistance

HO933es



Sizes	Ply Rating	Measuring Rim	Load Index/Speed Rating	Standard pressure
7.50R16LT	14PR	6.00G	122/118 M	770/770

ONYX



Features

- Special tread compound
- Block pattern design
- Extra wide footprint with square shoulder
- Reinforced carcass and bead design

Benefits

- Provide outstanding resistance to puncture and tearing
- Provide excellent driving and braking force
- Enhanced stability and resistance to abrasion
- Ensure excellent handling and provide outstanding loading capacity

RSHO375



Sizes	Ply Rating	Measuring Rim	Load Index/Speed Rating	Standard pressure
315/80R22.5	20PR	9.00	156/152L (154/151M)	860



Features

- Three circumferential grooves
- Block pattern design
- Special tread compound

Benefits

- Ensure outstanding water evacuation, even pressure distribution and heat dissipation
- Provide excellent driving and braking force
- Provide outstanding resistance to puncture and tearing
- Provide outstanding resistance to abrasion

HO935es



Sizes	Ply Rating	Measuring Rim	Load Index/Speed Rating	Standard pressure
7.50R16LT	14PR	6.5	122/118 M	900/900

ONYX



Features

- Block pattern design
- Extra wide footprint
- Deeper tread depth design

Benefits

- Provide excellent driving and braking force
- Enhanced stability and resistance to abrasion
- Improved mileage performance

RSHO356



Sizes	Ply Rating	Measuring Rim	Load Index/Speed Rating	Standard pressure
11R22.5	16PR	8.25	146/143 L	
275/80R22.5	18PR	9.00	149/146 M	900/900
295/80R22.5	18PR	9.00	152/149 L	860/860
315/80R22.5	20PR	9.00	156/152L (154/151M)	



Features

- Four circumferential grooves
- Solid shoulder design
- Specially designed compound

Benefits

- Provide excellent anti-sideslipping performance and ensure excellent water evacuation
- Provide outstanding resistance to abrasion
- Reduce rolling noise greatly
- Deliver lower rolling resistance

HO910es



Sizes	Ply Rating	Measuring Rim	Load Index/Speed Rating	Standard pressure
8.25R16LT	16PR	6.50H	128/124 M	770/770

ONYX



Features

- Three zigzag grooves
- Combination of rib and lug design
- Shoulder design with lugs

Benefits

- Provide excellent anti-sidesliping performance and ensure excellent water evacuation
- Deliver outstanding traction and handling
- Provide excellent heat dissipation

HO901es



Sizes	Ply Rating	Measuring Rim	Load Index/Speed Rating	Standard pressure
7.00R16LT	14PR	5.50F	118/114 M	770/770
7.50R16LT	14PR	6.00G	122/118 M	770/770
8.25R16LT	16PR	6.50H	128/124 M	770/770
11.00R20	18PR	20	152/149 K	930/930
12.00R20	20PR	8.5	156/153 K	900/900
12.00R24	20PR	8.5	160/157 K	900/900
11R22.5	16PR	8.25	146/143 M	830/830
12R22.5	18PR	9.00	152/149 M	930/930
13R22.5	20PR	9.75	156/153 L	875/875
315/60R22.5	20PR	9.00	157/154 M	900/900

ONYX



Features

- Three zigzag grooves
- Combination of rib and lug design
- Shoulder design with lugs

Benefits

- Provide excellent anti-sidesliping performance and ensure excellent water evacuation
- Deliver outstanding traction and handling
- Provide excellent heat dissipation

HO902es



Sizes	Ply Rating	Measuring Rim	Load Index/Speed Rating	Standard pressure
295/60R22.5	18PR	9.00	152/149 M	900(130)

Features

- Four wide circumferential grooves
- Siped rib and shoulder design
- Reinforced carcass and wide tread
- Specially designed compound

Benefits

- Ensure excellent water evacuation, even pressure distribution and heat dissipation
- Provide excellent heat dissipation
- Ensure excellent handling and safe performance
- Deliver lower rolling resistance



HO905es



Sizes	Ply Rating	Measuring Rim	Load Index/Speed Rating	Standard pressure
13R22.5	20PR	9.75	156/153 L	875(127)
315/60R22.5	20PR	9.00	157/154 M	900(130)
295/60R22.5	18PR	9.00	152/149M	900/900

ONYX



Features

- Four zigzag grooves
- Extra wide footprint with square shoulder
- Special tread compound

Benefits

- Provide excellent anti-sidesliping performance and ensure excellent water evacuation
- Enhanced stability and resistance to abrasion
- Provide outstanding resistance to abrasion

HO903es



Sizes	Ply Rating	Measuring Rim	Load Index/Speed Rating	Standard pressure
385/65R22.5	20PR	11.75	160 K	900(130)

Features

- Three zigzag grooves
- Reinforced carcass and bead design
- Special groove design
- Shoulder design with lugs

Benefits

- Provide excellent anti-sidesliping performance and ensure excellent water evacuation
- Ensure excellent handling and safe performance and provide outstanding loading capacity
- Deliver stone-ejecting property
- Provide excellent heat dissipation



HO908es



Sizes	Ply Rating	Measuring Rim	Load Index/Speed Rating	Standard pressure
315/60R22.5	20PR	9.00	157/154 M	900(130)



Features

- Four wide circumferential grooves
- Special groove design
- Siped rib and shoulder design

Benefits

- Ensure excellent water evacuation, even pressure distribution and heat dissipation
- Deliver stone-ejecting property
- Provide excellent heat dissipation

HO912es



STEER/TRAILER

Sizes	Ply Rating	Measuring Rim	Load Index/Speed Rating	Standard pressure
11R22.5	16PR	9.00	146/143 M	900/900



Features

- Block pattern design
- Extra wide footprint
- Deeper tread depth design

Benefits

- Provide excellent driving and braking force
- Enhanced stability and resistance to abrasion
- Improved mileage performance

HO921es



DRIVE

Sizes	Ply Rating	Measuring Rim	Load Index/Speed Rating	Standard pressure
12R22.5	18PR	9.00	152/149 M	930/930



Features

- Solid rib design combined with multiple sipes
- Four wide circumferential grooves
- Solid shoulder design

Benefits

- Provide excellent heat dissipation and improved regular wear with lower resistance
- Ensure excellent water evacuation, even pressure distribution and heat dissipation
- Provide outstanding resistance to abrasion

HO913es



STEER/TRAILER

Sizes	Ply Rating	Measuring Rim	Load Index/Speed Rating	Standard pressure
11R22.5	16PR	8.25	146/143 M	830/830



Features

- Three groove design with lugs
- Special tread compound
- Shoulder design with lugs and sipes

Benefits

- Outstanding wet performance
- Outstanding resistance to abrasion
- Excellent heat dissipation

HO928es



ALL POSITION

Sizes	Ply Rating	Measuring Rim	Load Index/Speed Rating	Standard pressure
11.00R20	18PR	20	152/149 K	930/930



Features

- Four wide circumferential grooves
- Siped rib and shoulder design
- Reinforced carcass and wide tread

Benefits

- Ensure excellent water evacuation, even pressure distribution and heat dissipation
- Provide excellent heat dissipation
- Ensure excellent handling and safe performance

HO915es



STEER/TRAILER

Sizes	Ply Rating	Measuring Rim	Load Index/Speed Rating	Standard pressure
12R22.5	18PR	8.5	152/149 M	900/900

ONYX



Features

- Lug and block pattern design
- Special groove design
- Special tread compound
- Open shoulder design

Benefits

- Ensure excellent water evacuation, even pressure distribution and heat dissipation
- Provides good traction and self-cleaning performance
- Provide outstanding resistance to puncture and tearing
- Deliver lower rolling resistance

HO918



STEER/TRAILER

Sizes	Ply Rating	Measuring Rim	Load Index/Speed Rating	Standard pressure
12.00R20	20PR	8.5	156/153 K	900/900

ONYX



Features

- Special tread compound
- Lug and special block pattern design

Benefits

- Provide outstanding resistance to puncture and tearing
- Improved traction, driving and braking performance

HO919



DRIVE/TRAILER

Sizes	Ply Rating	Measuring Rim	Load Index/Speed Rating	Standard pressure
12.00R20	20PR	8.5	156/153 D	900/900

ONYX



Features

- Lug and block pattern design
- Special tread compound
- Reinforced carcass and bead design

Benefits

- Improved traction, driving and braking performance
- Provide outstanding resistance to puncture and tearing
- Ensure excellent handling and safe performance and
- provide outstanding loading capacity

HO920



DRIVE/TRAILER

Sizes	Ply Rating	Measuring Rim	Load Index/Speed Rating	Standard pressure
12.00R20	20PR	8.5 1	56/153 D	900/900

ONYX



Features

- Four straight grooves design
- Tread surface with fine steel sipes design
- Stone ejectors set at the bootom of the side grooves

Benefits

- Provides excellent water drainage performance
- Provides good drainage and ensures good grip ability
- Protects the bottom of the grooves from hard gouges and cracks

RSHO162



STEER/TRAILER

Sizes	Ply Rating	Measuring Rim	Load Index/Speed Rating	Standard pressure
11R22.5	16PR	8.25	146/143 M	830(120)
295/80R22.5	18PR	9.00	152/149 M	900(130)
315/80R22.5	20PR	9.00	156/152 L(154/151 M)	860(125)
385/65R22.5	20PR	11.75	160K	900

ONYX



Features

- Special tread compound formula for mid to long distance
- Four straight grooves design
- Tread surface with fine steel sipes design
- Stone ejectors set at the bootom of the side grooves

Benefits

- Improves tyre wear mileage
- Provides excellent water drainage performance
- Provides good drainage and ensures good grip ability
- Protects the bottom of the grooves from hard gouges and cracks

RSHO162+



STEER/TRAILER

Sizes	Ply Rating	Measuring Rim	Load Index/Speed Rating	Standard pressure
275/80R22.5	18PR	9.00	149/146 M	850(123)
295/80R22.5	18PR	9.00	152/149M	850/850

ONYX



Features

- All position tread pattern design
- Special tread compound formula for Mid-Short distance
- Triple zigzag main grooves and shoulder cross grooves de
- Sipes design on tread surface

Benefits

- For a wide range of complex road conditions
- Provides good tear resistance and improves wear mileage
- Provides good grip on both dry and wet conditions
- Improves handling performance in wet conditions


RSHO572



ALL POSITION


Sizes	Ply Rating	Measuring Rim	Load Index/Speed Rating	Standard pressure
12.00R20	20PR	8.5	156/153 K	900(130)
12.00R24	20PR	8.5	160/157 K	900(130)
11R22.5	16PR	8.25	146/143 M	830(120)
315/80R22.5	20PR	9.00	156/152 L(154/151 M)	860(125)

PRODUCT RANGE



																
DIMENSION		HO689	HO122	HO368	HO309	HO310	HO312	HO308A	HO505	HO323	HO326	HO328	HO331	HO616	HO626	HO308A+
9.00R20	18PR													144/142 K		
10.00R20	18PR			149/146 K				149/146 K	149/146 K					149/146 K	149/146 K	
11.00R20	18PR														152/149 K	
12.00R20	20PR													156/153 K		
12.00R24	20PR	160/157 K	160/157 K			160/157 K										
11R22.5	16PR				148/145 M		146/143 L	148/145 M		146/143 L						
12R22.5	18PR				152/149 L			152/149 M								152/149 K
13R22.5	20PR				156/152 L(154/151 M)											
11R24.5	14PR						146/143 M			146/143 M						
11R24.5	16PR						149/146 L			149/146 L						
215/75R17.5	16PR				135/133 J											
235/75R17.5	16PR				143/141 J											
295/75R22.5	14PR						144/141 M			144/141 M						
295/75R22.5	16PR						146/143 L			146/143 L						
295/80R22.5	18PR			152/149 M	152/149 M						152/149 M					
315/70R22.5	20PR				154/150 L(152/148 M)			154/150 L(152/148 M)			154/150 L					
315/80R22.5	20PR		156/152 L(154/151 M)		156/152 L(154/151 M)			156/152 L(154/151 M)			156/152 L	156/152 L	156/152 L			
285/75R24.5	14PR						144/141 M			144/141 M						
285/75R24.5	16PR						147/144 L			147/144 L						

PRODUCT RANGE


[illegible]

PRODUCT RANGE




DIMENSION	HO301	HO301+	HO307	HO105+	HO302	HO306	HO311	HO313	HO322	HO329	HO303	HO325	HO302W	HO399					
6.50R16LT 12PR	113/110 K																		
7.00R16LT 14PR	118/114 M					118/114 M					118/114 K								
7.50R16LT 14PR	122/118 M					122/118 M					122/118 J								
8.25R16LT 16PR	128/124 M					128/124 M		128/124 L			128/124 J								
8.25R20 16PR	139/137 L					139/137 L		139/137 K			139/137 K								
9.00R20 16PR	144/142 K					144/142 J	144/142 J	144/142 K			144/142 J			144/142 K					
10.00R20 18PR	149/146 K	149/146 K		149/146 K	149/146 K	149/146 K	149/146 K	149/146 K			149/146 K			149/146 K					
11.00R20 18PR	152/149 K	152/149 K		152/149 J	152/149 K	152/149 K	152/149 K	152/149 K			152/149 J			152/149 K					
12.00R20 20PR	156/153 K	156/153 K		156/153 J	156/153 K	156/153 K	156/153 K	156/153 K			156/153 J			156/153 K					
12.00R24 20PR	160/157 K								160/157 K	160/157 K		160/157 K							
11R22.5 16PR	148/145 M									148/145 L									
12R22.5 18PR	152/149 M	152/149 L		152/149 M		152/149 M													
13R22.5 20PR	156/152 L (154/151 M)			156/152 L (154/151 M)															
11R24.5 16PR	149/146 L																		
315/60R22.5 20PR		156/152 L (154/151 M)		156/152 L (154/151 M)	156/152 L (154/151 M)								156/152 L (154/151 M)						

















PRODUCT RANGE



DIMENSION	HO168	HO317	HO318	HO320	HO321	HO929	HO826	HO332											
7.00R16LT 14PR	118/114 K																		
7.50R16LT 14PR	122/118 K																		
8.25R16LT 16PR	128/124 K																		
8.25R20 16PR	139/137 C		139/137 C																
9.00R20 16PR	144/142 C		144/142 C																
10.00R20 18PR	149/146 C	149/146 K	149/146 C																
11.00R20 18PR		152/149 K	152/149 C		152/149 C	152/149 C													
12.00R20 20PR	156/153 C	156/153 K	156/153 C		156/153 C														
12.00R24 20PR		160/157 C					160/157 K												
11R22.5 16PR							146/143 M	148/145 J											
11R24.5 16PR								149/146 K											
295/60R22.5 18PR			152/149 C	152/149 C			152/149 M												

PRODUCT RANGE



																	
DIMENSION	HO105	HO117	HO599+	HO599	HO101	HO102	HO104	HO104+	HO106	HO111	HO121	HO123	HO124	HO680	HO127	HO788	
7.50R16LT 16PR				125/121 L											125/121 L		
8.25R16LT 16PR											128/124 M						
9.00R20 16PR	144/142 K						144/142 K										
10.00R20 18PR	149/146 K						149/146 K										
11.00R20 18PR	152/149 K		152/149 J	152/149 K			152/149 K				152/149 K	152/149 K					
12.00R20 20PR	156/153 K						156/153 K										
9.5R17.5 16PR											143/141 J						
11R22.5 16PR					148/145 M	148/145 M	148/145 M			146/143 L							
12R22.5 18PR		152/149 L			152/149 M	152/149 M											
13R22.5 20PR						156/152 L (154/151 M)											
11R24.5 14PR										146/143 M							
215/75R17.5 16PR						135/133 J				135/133 L							
235/75R17.5 18PR										143/141 L							
225/70R19.5 14PR										128/126 L							
245/70R19.5 16PR										135/133 L							
255/70R22.5 16PR						140/137 L				140/137 L							
295/75R22.5 14PR										144/141 M							
295/75R22.5 16PR										146/143 L							
295/80R22.5 18PR						152/149 M			152/149 M		152/149 M					152/149 M	
315/70R22.5 20PR						154/150 L (152/148 M)					154/150 L (152/148 M)						
315/80R22.5 20PR						156/152 L (154/151 M)		156/152 L (154/151 M)			156/152 L (154/151 M)		156/152 L (154/151 M)	156/152 L (154/151 M)			
285/75R24.5 14PR										144/141 M							
285/75R24.5 16PR										147/144 L							


PRODUCT RANGE



DIMENSION NAM517NAM537NDM216NTM313

[illegible]

PRODUCT RANGE



DIMENSION	NAR515	NAR532	NAR518	NAL535	NAL536	NAU512	NSL129	NAL568	NDL230	NDR233	NDR255	NTL311	NTL331	NTL357
8.25R15(TR) 14PR				129/127 L										
10.00R15TR 14PR				137/135 L										
8.5R17.5 12PR								121/120 M						
8R19.5 12PR					124/122 M									
9R22.5 14PR					136/134 M									
10R22.5 14PR					141/139 M					141/139 L				
11R22.5 14PR	144/142 M	144/142 M					144/142 M		144/142 M				144/142 M	
11R22.5 16PR	148/145 L	146/143 L							146/143 L	146/143 L				
12R22.5 18PR	152/149 L													
11R24.5 14PR		146/143 M					146/143 M		146/143 L				146/143 M	
11R24.5 16PR		149/146 L							149/146 L	149/146 L				
215/75R17.5 16PR				135/133 J										
225/75R17.5 14PR			129/127 M											
235/75R17.5 16PR				143/141 J										
245/70R17.5 16PR			136/134 M											
245/70R17.5 18PR			146/146 F(143/141 J)											
435/50R19.5 20PR														160 J
225/70R19.5 14PR				128/126 M										
245/70R19.5 14PR				133/131 M										
245/70R19.5 16PR			136/134 M											
245/70R19.5 18PR			141/140 J											
265/70R19.5 16PR			140/138 M											
265/70R19.5 18PR			143/141 J								143/141 J			
285/70R19.5 16PR			146/144 L(144/142 M)											
285/70R19.5 18PR			150/148 J											
255/70R22.5 16PR				140/137 L										
275/70R22.5 16PR	148/145 M					148/145 J								
275/70R22.5 18PR				152/148 J										
295/75R22.5 14PR		144/141 M					144/141 M		144/141 M				144/141 M	
295/75R22.5 16PR		146/143 L							146/143 L					
295/80R22.5 18PR	152/149 M													
315/80R22.5 20PR	156/152 K				157/154 K									
385/55R22.5 20PR												160 K(158 L)		
385/65R22.5 20PR												160 K(158 L)		
425/65R22.5 20PR												165 K		
445/65R22.5 20PR												169 K		
285/75R24.5 14PR		144/142 M					144/142 M		144/142 L				144/142 M	
285/75R24.5 16PR		147/144 L							147/144 L					

Technical File

Size	PR	Width	A/R	Rim	LOAD INDEX	SPEED RATING	PATTERN	M+S	APPLICATION	STANDARD RIM	MAX LOAD(KG) SINGLE	MAX LOAD(KG) DUAL	MAX PRESSURE(PN) SINGLE	MAX PRESSURE(PN) DUAL	TREAD DEPTH (mm)	SECTION WIDTH (mm)	OUTER DIAMETER (mm)
12R22.5	18	12		22.5	152/148	M	HO308A+	M+S	L&R	9.00	3550	3250	630	930	20	302	1087
13R22.5	20	13		22.5	156/152(154/151)	L/M	HO102	M+S	L&R	9.75	4000	3550	860	880	17	320	1124
13R22.5	20	13		22.5	156/152(154/151)	L/M	HO301	M+S	M	9.75	4000	3550	860	880	18.5	320	1124
13R22.5	20	13		22.5	156/152(154/151)	L/M	HO302	M+S	M	9.75	4000	3550	860	880	20	320	1124
13R22.5	20	13		22.5	156/152(154/151)	L/M	HO309	M+S	L&R	9.75	4000	3550	860	880	18	320	1124
11R24.5	14	11		24.5	146/143	M	HO111		L&R	8.25	3000	2725	720	720	15	279	1104
11R24.5	14	11		24.5	146/143	M	HO312		L&R	8.25	3000	2725	720	720	21.5	279	1104
11R24.5	14	11		24.5	146/143	M	HO323	M+S	L&R	8.25	2800	2575	760	760	22	283	1062
11R24.5	16	11		24.5	149/146	L	HO111		L&R	8.25	3250	3000	830	830	15	279	1104
11R24.5	16	11		24.5	149/146	L	HO301	M+S	M	8.25	3250	3000	830	830	15.5	279	1104
11R24.5	16	11		24.5	149/146	L	HO312		L&R	8.25	3250	3000	830	830	21.5	279	1104
11R24.5	16	11		24.5	149/146	L	HO323	M+S	M	8.25	3250	3000	830	830	21.5	279	1116
11R24.5	16	11		24.5	149/146	L	HO126	M+S	M	8.25	3250	3000	830	830	10	302	1104
11R24.5	16	11		24.5	149/146	K	HO332	M+S	O	8.25	3250	3000	830	830	24.5	284	1114.5
215/75R17.5	16	215	75	17.5	135/133	J	HO102	M+S	L&R	6.00	2180	2060	850	850	12	212	767
215/75R17.5	16	215	75	17.5	135/133	L	HO111	M+S	L&R	6.00	2180	2060	850	850	13	212	767
215/75R17.5	16	215	75	17.5	135/133	J	HO309	M+S	L&R	6.00	2180	2060	850	850	14	212	767
235/75R17.5	16	235	75	17.5	143/141	J	HO107	M+S	L&R	6.75	2725	2575	875	875	13	233	797
235/75R17.5	16	235	75	17.5	143/141	L	HO111	M+S	L&R	6.75	2725	2575	875	875	13	233	797
235/75R17.5	16	235	75	17.5	143/141	J	HO309	M+S	L&R	6.75	2725	2575	875	875	15	233	797
225/70R19.5	14	225	70	19.5	128/126	L	HO111		L&R	6.75	1800	1700	760	760	13	226	811
245/70R19.5	16	245	70	19.5	135/133	L	HO111		L&R	7.50	2180	2060	830	830	13	248	839
255/70R22.5	16	255	70	22.5	140/137	L	HO102		L&R	7.50	2500	2300	830	830	14	255	930
255/70R22.5	16	255	70	22.5	140/137	L	HO111		L&R	7.50	2500	2300	830	830	13	255	930
285/75R22.5	14	285	75	22.5	144/141	M	HO111		L&R	8.00	2800	2575	760	760	15.5	298	1014
285/75R22.5	14	285	75	22.5	144/141	M	HO312		L&R	8.00	2800	2575	760	760	22	298	1026
285/75R22.5	14	285	75	22.5	144/141	M	HO118	M+S	L&R	8.00	2800	2575	760	760	11	298	1014
285/75R22.5	14	285	75	22.5	144/141	M	HO323	M+S	L&R	8.00	2800	2575	760	760	22	298	1026
295/75R22.5	16	295	75	22.5	146/143	L	HO111		L&R	8.00	3000	2725	830	830	15.5	298	1014
295/75R22.5	16	295	75	22.5	146/143	L	HO312		L&R	8.00	3000	2725	830	830	22	298	1026
295/75R22.5	16	295	75	22.5	146/143	L	HO118	M+S	L&R	8.00	3000	2725	830	830	11	298	1014
295/75R22.5	16	295	75	22.5	146/143	L	HO323	M+S	L&R	8.00	3000	2725	830	830	22	298	1026
295/75R22.5	16	295	75	22.5	146/143	L	HO126	M+S	L&R	8.00	3000	2725	830	830	10	298	1014
295/80R22.5	18	295	80	22.5	152/148	C	HO320	M+S	O	8.00	3550	3250	900	900	21.5	298	1044
295/80R22.5	18	295	80	22.5	152/148	M	HO121	M+S	L&R	8.00	3550	3250	900	900	16.5	298	1044
295/80R22.5	18	295	80	22.5	152/148	M	HO102	M+S	L&R	8.00	3550	3250	900	900	15	298	1044
295/80R22.5	18	295	80	22.5	152/148	M	HO106	M+S	L&R	8.00	3550	3250	900	900	15	298	1044
295/80R22.5	18	295	80	22.5	152/148	M	HO309	M+S	L&R	8.00	3550	3250	900	900	20.5	298	1044
295/80R22.5	18	295	80	22.5	152/148	C	HO318	M+S	O	8.00	3550	3250	900	900	21.5	298	1044
295/80R22.5	18	295	80	22.5	152/148	M	HO368	M+S	L&R	8.00	3550	3250	900	900	18	298	1044
295/80R22.5	18	295	80	22.5	152/148	M	HO326	M+S	L&R	8.00	3550	3250	900	900	17.5	298	1044
295/80R22.5	18	295	80	22.5	152/148	M	HO788	M+S	L&R	8.00	3550	3250	900	900	18	292	1047
295/80R22.5	18	295	80	22.5	152/148	M	HO826	M+S	O	8.00	3550	3250	900	900	24.5	292	1060
315/70R22.5	20	315	70	22.5	154/150(152/148)	L/M	HO102	M+S	L&R	9.00	3750	3350	900	900	15	312	1014
315/70R22.5	20	315	70	22.5	154/150(152/148)	L/M	HO121	M+S	L&R	9.00	3750	3350	900	900	15.5	312	1014
315/70R22.5	20	315	70	22.5	154/150(152/148)	L/M	HO308A	M+S	L&R	9.00	3750	3350	900	900	20	312	1014
315/70R22.5	20	315	70	22.5	154/150(152/148)	L/M	HO309	M+S	L&R	9.00	3750	3350	900	900	21	312	1014
315/70R22.5	20	315	70	22.5	154/150	L	HO326	M+S	L&R	9.00	3750	3350	900	900	19.5	312	1014
315/80R22.5	20	315	80	22.5	156/152(154/151)	L/M	HO102	M+S	L&R	9.00	4000	3550	860	860	14.5	312	1076
315/80R22.5	20	315	80	22.5	156/152(154/151)	L/M	HO104	M+S	L&R	9.00	4000	3550	860	860	14.5	312	1076
315/80R22.5	20	315	80	22.5	156/152(154/151)	L/M	HO121	M+S	L&R	9.00	4000	3550	860	860	15.5	312	1076
315/80R22.5	20	315	80	22.5	156/152(154/151)	L/M	HO122	M+S	L&R	9.00	4000	3550	860	860	16.5	312	1076
315/80R22.5	20	315	80	22.5	156/152(154/151)	L/M	HO124	M+S	L&R	9.00	4000	3550	860	860	15.5	312	1076

Technical File

Size	PR	Width	A/R	Rim	LOAD INDEX	SPEED RATING	PATTERN	M+S	APPLICATION	STANDARD RIM	MAX LOAD(KG) SINGLE	MAX LOAD(KG) DUAL	MAX PRESSURE(KPA) SINGLE	MAX PRESSURE(KPA) DUAL	TREAD DEPTH (mm)	SECTION WIDTH (mm)	OUTER DIAMETER (mm)
315/80R22.5	20	315	80	22.5	156/152(154/151)	L(M)	HO301+	M+S	M	9.00	4000	3550	860	860	17.5	312	1076
315/80R22.5	20	315	80	22.5	156/152(154/151)	L(M)	HO302	M+S	M	9.00	4000	3550	860	860	23	312	1076
315/80R22.5	20	315	80	22.5	156/152(154/151)	L(M)	HO308A	M+S	L&R	9.00	4000	3550	860	860	23	312	1076
315/80R22.5	20	315	80	22.5	156/152(154/151)	L(M)	HO309	M+S	L&R	9.00	4000	3550	860	860	20	312	1076
315/80R22.5	20	315	80	22.5	156/152(154/151)	L(M)	HO322	M+S	M	9.00	4000	3550	860	860	20.5	312	1076
315/80R22.5	20	315	80	22.5	156/152(154/151)	L(M)	HO680	M+S	L&R	9.00	4000/3550	860/860	125/125	14.5	312	1076	
315/80R22.5	20	315	80	22.5	156/152	L	HO326	M+S	L&R	9.00	4000	3550	860	860	20	312	1076
315/80R22.5	20	315	80	22.5	156/152	L	HO328	M+S	L&R	9.00	4000	3550	860	860	20	312	1076
315/80R22.5	20	315	80	22.5	156/152	L	HO331	M+S	L&R	9.00	4000	3550	860	860	20	312	1076
315/80R22.5	20	315	80	22.5	156/152(154/151)	L(M)	HO788W	M+S	M	9.00	4000	3550	860	860	23	312	1076
315/80R22.5	20	315	80	22.5	156/152(154/151)	L(M)	HO327		L&R	9.00	4000	3550	860	860	20	312	1076
315/80R22.5	20	315	80	22.5	156/152(154/151)	L(M)	HO105+	M+S	M	9.00	4000	3550	860	860	17.5	312	1076
385/65R22.5	20	385	65	22.5	160	K	HO107	M+S	L&R	11.75	4500	-	800	-	17	369	1072
285/75R24.5	14	285	75	24.5	144/141	M	HO111		L&R	8.25	2800	2575	790	790	15.5	283	1050
285/75R24.5	14	285	75	24.5	144/141	M	HO312		L&R	8.25	2800	2575	790	790	22	283	1056
285/75R24.5	14	285	75	24.5	144/141	M	HO323	M+S	L&R	8.25	2800	2575	790	790	22	283	1062
285/75R24.5	16	285	75	24.5	147/144	L	HO111		L&R	8.25	3075	2800	830	830	15.5	283	1050
285/75R24.5	16	285	75	24.5	147/144	L	HO312		L&R	8.25	3075	2800	830	830	22	283	1056
285/75R24.5	16	285	75	24.5	147/144	L	HO323	M+S	L&R	8.25	3075	2800	830	830	22	283	1062
285/75R24.5	16	285	75	24.5	147/144	L	HO126	M+S	L&R	8.25	3075	2800	830	830	10	283	1050
325/65R24	22				162/160	K	R9HO373			9.00	4750	4500	850	850	17	325	1228
325/65R24	22				162/160	K	R9HO572			9.00	4750	4500	850	850	17	325	1228

Technical File

Size	PR	Width	A/R	Rim	LOAD INDEX	SPEED RATING	PATTERN	M+S	APPLICATION	STANDARD RIM	MAX LOAD(KG) SINGLE	MAX LOAD(KG) DUAL	MAX PRESSURE(KPA) SINGLE	MAX PRESSURE(KPA) DUAL	TREAD DEPTH (mm)	SECTION WIDTH (mm)	OUTER DIAMETER (mm)
6.50R16LT	12	6.5		16	110/105	K	HC301		M	5.50F	1150	1030	770	770	11.0	185	750
7.00R16LT	14	7		16	118/114	K	HC168		O	5.50F	1320	1180	770	770	15.5	200	775
7.00R16LT	14	7		16	118/114	M	HC303		M	5.50F	1320	1180	770	770	12.0	200	775
7.00R16LT	14	7		16	118/114	K	HC303		M	5.50F	1320	1180	770	770	14.0	200	775
7.00R16LT	14	7		16	118/114	M	HC306		M	5.50F	1320	1180	770	770	14.0	200	775
7.50R16LT	14	7.5		16	122/118	K	HC168		O	6.00G	1500	1320	770	770	16.6	215	805
7.50R16LT	14	7.5		16	122/118	M	HC301+		M	6.00G	1500	1320	770	770	13	215	805
7.50R16LT	14	7.5		16	122/118	J	HC303		M	6.00G	1500	1320	770	770	15	215	805
7.50R16LT	14	7.5		16	122/118	M	HC306		M	6.00G	1500	1320	770	770	14	215	805
7.50R16LT	14	7.5		16	122/118	M	HC313		M	6.00G	1500	1320	770	770	15	215	805
7.50R16LT	16	7.50		16	125/121	L	HC127	M+S	L&R	6.00G	1650	1450	870	870	12	215	805
7.50R16LT	16	7.50		16	125/121	L	HC589	M+S	L&R	6.00G	1650	1450	870	870	12	315	1228
8.25R16LT	16	8.25		16	128/124	M	HC121		L&R	6.50H	1800	1600	770	770	13.5	235	855
8.25R16LT	16	8.25		16	128/124	K	HC168		O	6.50H	1800	1600	770	770	16	235	855
8.25R16LT	16	8.25		16	128/124	M	HC301		M	6.50H	1800	1600	770	770	16	235	855
8.25R16LT	16	8.25		16	128/124	J	HC303		M	6.50H	1800	1600	770	770	16	235	855
8.25R16LT	16	8.25		16	128/124	M	HC306		M	6.50H	1800	1600	770	770	15	235	855
8.25R16LT	16	8.25		16	128/124	M	HC313		M	6.50H	1800	1600	770	770	16	235	855
8.25R20	16	8.25		20	136/137	C	HC168		O	6.5	2430	2380	930	930	21	236	974
8.25R20	16	8.25		20	136/137	L	HC301		M	6.5	2430	2380	930	930	13.5	236	974
8.25R20	16	8.25		20	136/137	K	HC303		M	6.5	2430	2380	930	930	16	236	974
8.25R20	16	8.25		20	136/137	L	HC306		M	6.5	2430	2380	930	930	14.5	236	974
8.25R20	16	8.25		20	136/137	K	HC313		M	6.5	2430	2380	930	930	16	236	974
8.25R20	16	8.25		20	136/137	C	HC318		O	6.5	2430	2380	930	930	16	236	974
9.00R20	16	9		20	144/142	K	HC104		L&R	7.0	2800	2650	900	900	15	259	1019
9.00R20	16	9		20	144/142	K	HC105		L&R	7.0	2800	2650	900	900	15	259	1019
9.00R20	16	9		20	144/142	C	HC168		O	7.0	2800	2650	900	900	21.5	259	1019
9.00R20	16	9		20	144/142	K	HC301		M	7.0	2800	2650	900	900	15.5	259	1019
9.00R20	16	9		20	144/142	J	HC303		M	7.0	2800	2650	900	900	17	259	1019
9.00R20	16	9		20	144/142	K	HC306		M	7.0	2800	2650	900	900	16	259	1019
9.00R20	16	9		20	144/142	J	HC311		M	7.0	2800	2650	900	900	16.5	259	1019
9.00R20	16	9		20	144/142	K	HC313		M	7.0	2800	2650	900	900	17	259	1019
9.00R20	16	9		20	144/142	C	HC318		M	7.0	2800	2650	900	900	17	259	1019
9.00R20	16	9		20	144/142	K	HC318		L&R	7.0	2800	2650	900	900	16	260	1019
9.00R20	16	9		20	144/142	K	HC399		M	7.0	2800	2650	900	900	16	260	1023
10.00R20	18	10		20	149/146	K	HC104		L&R	7.5	3250	3000	930	930	15	278	1054
10.00R20	18	10		20	149/146	K	HC105		L&R	7.5	3250	3000	930	930	16.5	278	1054
10.00R20	18	10		20	149/146	C	HC168		O	7.5	3250	3000	930	930	22	278	1054
10.00R20	18	10		20	149/146	K	HC301		M	7.5	3250	3000	930	930	16.5	278	1054
10.00R20	18	10		20	149/146	K	HC302		M	7.5	3250	3000	930	930	18	278	1054
10.00R20	18	10		20	149/146	K	HC303		M	7.5	3250	3000	930	930	18	278	1054
10.00R20	18	10		20	149/146	K	HC306		M	7.5	3250	3000	930	930	17	278	1054
10.00R20	18	10		20	149/146	K	HC307		M	7.5	3250	3000	930	930	17	278	1054
10.00R20	18	10		20	149/146	K	HC308A		L&R	7.5	3250	3000	930	930	22	278	1054
10.00R20	18	10		20	149/146	K	HC311		M	7.5	3250	3000	930	930	17	278	1054
10.00R20	18	10		20	149/146	K	HC313		M	7.5	3250	3000	930	930	18	278	1054
10.00R20	18	10		20	149/146	K	HC317		O	7.5	3250	3000	930	930	20.5	278	1065
10.00R20	18	10		20	149/146	C	HC318		O	7.5	3250	3000	930	930	18	278	1054
10.00R20	18	10		20	149/146	K	HC368		L&R	7.5	3250	3000	930	930	21	278	1054
10.00R20	18	10		20	149/146	K	HC369		L&R	7.5	3250	3000	930	930	20.5	278	1054
10.00R20	18	10		20	149/146	K	HC318		L&R	7.5	3250	3000	930	930	18.5	278	1049
10.00R20	18	10		20	149/146	K	HC326	M+S	L&R	7.5	3250	3000	930	930	15	278	1046
10.00R20	18	10		20	149/146	K	HC399		M	7.5	3250	3000	930	930	18	278	1054
11.00R20	18	11		20	152/149	K	HC104		L&R	8.0	3550	3250	930	930	17	293	1085
11.00R20	18	11		20	152/149	K	HC105		L&R	8.0	3550	3250	930	930	17	293	1085
11.00R20	18	11		20	152/149	K	HC121		L&R	8.0	3550	3250	930	930	16.5	293	1085
11.00R20	18	11		20	152/149	K	HC123		L&R	8.0	3550	3250	930	930	16.5	293	1085
11.00R20	18	11		20	152/149	K	HC301		M	8.0	3550	3250	930	930	17	293	1085
11.00R20	18	11		20	152/149	J	HC302		M	8.0	3550	3250	930	930	18	293	1085

Technical File

Size	PR	Width	A/R	Rim	LOAD INDEX	SPEED RATING	PATTERN	M+S	APPLICATION	STANDARD RIM	MAX LOAD(KG) SINGLE	MAX LOAD(KG) DUAL	MAX PRESSURE(KPA) SINGLE	MAX PRESSURE(KPA) DUAL	TREAD DEPTH (mm)	SECTION WIDTH (mm)	OUTER DIAMETER (mm)
11.00R20	18	11		20	152/149	J	HC0303		M	8.0	3550	3250	930	930	19	293	1085
11.00R20	18	11		20	152/149	K	HC0306		M	8.0	3550	3250	930	930	17.5	293	1085
11.00R20	18	11		20	152/149	K	HC0307		M	8.0	3550	3250	930	930	17.5	293	1085
11.00R20	18	11		20	152/149	K	HC0311		M	8.0	3550	3250	930	930	18	293	1085
11.00R20	18	11		20	152/149	K	HC0313		M	8.0	3550	3250	930	930	19	293	1085
11.00R20	18	11		20	152/149	K	HC0317		O	8.0	3550	3250	930	930	21	293	1085
11.00R20	18	11		20	152/149	C	HC0318		O	8.0	3550	3250	930	930	24	293	1085
11.00R20	18	11		20	152/149	C	HC0321		O	8.0	3550	3250	930	930	24	293	1085
11.00R20	18	11		20	152/149	J	HC0599+		L&R	8.0	3550	3250	930	930	17.5	293	1085
11.00R20	18	11		20	152/149	K	HC0599		L&R	8.0	3550	3250	930	930	16.5	288	1083
11.00R20	18	11		20	152/149	K	HC0626	M+S	M	8.0	3550	3250	930	930	15.5	278	1046
11.00R20	18	11		20	152/149	K	HC0399		M	8.0	3550	3250	930	930	20	288	1088
11.00R20	18	11		20	152/149	C	HC0929	M+S	O	8.0	3550	3250	930	930	27.5	288	1106
12.00R20	20	12		20	156/153	K	HC1014		L&R	8.5	3750	3450	830	830	17.5	315	1125
12.00R20	20	12		20	156/153	K	HC1015		L&R	8.5	3750	3450	830	830	17.5	315	1125
12.00R20	20	12		20	156/153	C	HC168		O	8.5	3750	3450	830	830	24	315	1136
12.00R20	20	12		20	156/153	K	HC301		M	8.5	3750	3450	830	830	17.5	315	1125
12.00R20	20	12		20	156/153	J	HC302		M	8.5	3750	3450	830	830	20	315	1125
12.00R20	20	12		20	156/153	J	HC303		M	8.5	3750	3450	830	830	20	315	1125
12.00R20	20	12		20	156/153	K	HC306		M	8.5	3750	3450	830	830	18.5	315	1125
12.00R20	20	12		20	156/153	K	HC307		M	8.5	3750	3450	830	830	18	315	1125
12.00R20	20	12		20	156/153	K	HC311		M	8.5	3750	3450	830	830	19	315	1125
12.00R20	20	12		20	156/153	K	HC313		M	8.5	3750	3450	830	830	20	315	1125
12.00R20	20	12		20	156/153	K	HC317		O	8.5	3750	3450	830	830	21.5	315	1125
12.00R20	20	12		20	156/153	C	HC318		O	8.5	3750	3450	830	830	25	315	1136
12.00R20	20	12		20	156/153	C	HC321		O	8.5	3750	3450	830	830	25	315	1136
12.00R20	20	12		20	156/153	K	HC0616	M+S	L&R	8.5	4000	3650	900	900	18.5	310	1122
12.00R20	20	12		20	156/153	K	HC0399		M	8.5	4000	3650	900	900	21	310	1130
12.00R24	20	12		24	160/157	K	HC1022		L&R	8.5	4500	4125	900	900	15.5	315	1125
12.00R24	20	12		24	160/157	K	HC1031		M	8.5	4500	4125	900	900	16	315	1125
12.00R24	20	12		24	160/157	K	HC1010		L&R	8.5	4500	4125	900	900	20	315	1125
12.00R24	20	12		24	160/157	K	HC1022		M	8.5	4500	4125	900	900	16	315	1125
12.00R24	20	12		24	160/157	K	HC1029		M	8.5	4500	4125	900	900	19	315	1125
12.00R24	20	12		24	160/157	K	HC1025	M+S	M	8.5	4500	4125	900	900	18.5	315	1126
12.00R24	20	12		24	160/157	C	HC1017		M	8.5	4500	4125	900	900	18.5	326	1226
12.00R24	20	12		24	160/157	K	HC0880	M+S	L&R	8.5	4500	4125	900	900	16	315	1216
12.00R24	20	12		24	160/157	K	HC0826	M+S	O	8.5	4500	4125	900	900	24	238	1231
8.5R17.5	16	8.5		17.5	143/141	J	HC1021		L&R	6.75	2725	2575	875	875	13	240	842
11R22.5	16	11		22.5	148/145	M	HC1011	M+S	L&R	8.25	3150	2900	850	850	15	279	1054
11R22.5	16	11		22.5	148/145	M	HC1032	M+S	L&R	8.25	3150	2900	850	850	15	279	1054
11R22.5	16	11		22.5	148/145	M	HC1014	M+S	L&R	8.25	3150	2900	850	850	15	279	1054
11R22.5	16	11		22.5	146/143	L	HC1111	M+S	L&R	8.25	3000	2725	830	830	15	279	1054
11R22.5	16	11		22.5	148/145	M	HC1018	M+S	L&R	8.25	3150	2900	850	850	15.5	279	1054
11R22.5	16	11		22.5	148/145	M	HC0901	M+S	M	8.25	3150	2900	850	850	15.5	279	1054
11R22.5	16	11		22.5	148/145	M	HC1038A	M+S	L&R	8.25	3150	2900	850	850	20	279	1054
11R22.5	16	11		22.5	148/145	M	HC0309	M+S	L&R	8.25	3150	2900	850	850	16.5	279	1054
11R22.5	16	11		22.5	146/143	L	HC10312	M+S	L&R	8.25	3000	2725	830	830	21.5	279	1065
11R22.5	16	11		22.5	148/145	L	HC03039	M+S	M	8.25	3000	2725	830	830	21.5	279	1065
11R22.5	16	11		22.5	146/143	L	HC10323	M+S	L&R	8.25	3000	2725	830	830	21.5	279	1065
11R22.5	16	11		22.5	146/143	L	HC10126	M+S	L&R	8.25	3000	2725	830	830	10	279	1054
11R22.5	16	11		22.5	146/143	M	HC06126	M+S	O	8.25	3000	2725	830	830	22.5	273	1058
11R22.5	16	11		22.5	148/145	J	HC10332	M+S	O	8.25	3150	2900	850	850	24.5	279	1065
12R22.5	18	12		22.5	152/149	M	HC10101		L&R	9.00	3550	3250	930	930	16.5	300	1085
12R22.5	18	12		22.5	152/149	M	HC10102		L&R	9.00	3550	3250	930	930	16.5	300	1085
12R22.5	18	12		22.5	152/149	L	HC10117		L&R	9.00	3550	3250	930	930	16	300	1085
12R22.5	18	12		22.5	152/149	M	HC10118		L&R	9.00	3550	3250	930	930	12.5	300	1085
12R22.5	18	12		22.5	152/149	M	HC10301	M+S	M	9.00	3550	3250	930	930	16	300	1085
12R22.5	18	12		22.5	152/149	M	HC10302		M	9.00	3550	3250	930	930	20	300	1085
12R22.5	18	12		22.5	152/149	L	HC10307		M	9.00	3550	3250	930	930	16	300	1085
12R22.5	18	12		22.5	152/149	M	HC10308A	M+S	L&R	9.00	3550	3250	930	930	16	300	1085
12R22.5	18	12		22.5	152/149	L	HC10300		L&R	9.00	3550	3250	930	930	17.5	300	1085
12R22.5	18	12		22.5	152/149	M	HC10311	M+S	M	9.00	3550	3250	930	930	18.5	300	1085


Technical File



Technical File



Technical File

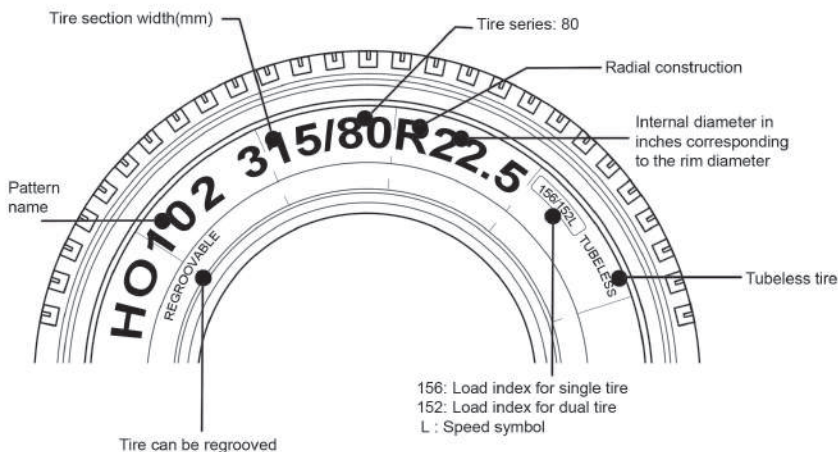

Refer to the Speed Symbols and Load Capacity Index tables below



Before fitting, it is essential to check the different markings to ensure that the tires meet the maximum load and speed possibilities and/or the regulations in force

Speed Symbols



SI	km/h
B	50
C	60
D	65
E	70
F	80
G	90
J	100
K	110
L	120
M	130
N	140
P	150
Q	160
R	170

Load Capacity Index

LI	KG	LI	KG	LI	KG
115	1215	136	2240	157	4125
116	1250	137	2300	158	4250
117	1285	138	2360	159	4375
118	1320	139	2430	160	4500
119	1360	140	2500	161	4625
120	1400	141	2575	162	4750
121	1450	142	2650	163	4875
122	1500	143	2725	164	5000
123	1550	144	2800	165	5150
124	1600	145	2900	166	5300
125	1650	146	3000	167	5450
126	1700	147	3075	168	5600
127	1750	148	3150	169	5800
128	1800	149	3250	170	6000
129	1850	150	3350	171	6150
130	1900	151	3450	172	6300
131	1950	152	3550	173	6500
132	2000	153	3650	174	6700
133	2060	154	3750	175	6900
134	2120	155	3875	176	7100
135	2180	156	4000	177	7300

Tire Usage Tips

Important instructions for safe inflation

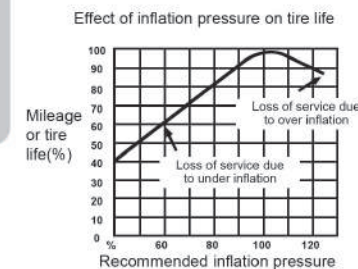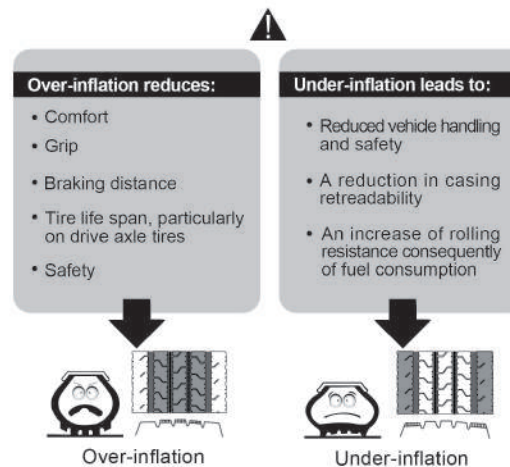

ADVICE BEFORE INFLATION

- 1 Weigh your vehicle and its load, axle by axle, to determine tire pressure
- 2 Measure the pressure when cold (when the vehicle has been stationary for several hours): pressures must be checked at regular intervals and during each service
- 3 Important safety instruction: pressure increases when the vehicle is in motion, never reduce the pressure of a hot tire
- 4 Pressure gauges must be accurate, handled with care and calibrated regularly



Caution: Driving with insufficient pressure can damage your tires. Have your tires fully checked over by an expert

